

Handle with cylinder hole and exterior flush pull kit

Description

Brass or anodised aluminium handle with cylinder hole and flush-mounted pull, suitable for Lift & Slide door windows.

Application


This handle is particularly recommended for door windows because of its size and functionality, as the length of the lever makes it easier to lift the carriages. The cylinder, which oper-

ates the locking mechanism, provides additional security. As the exterior plate is blind, it is necessary to install a half cylinder of suitable length considering the thickness of the sash. The sash can be opened and closed from the inside only.

Mounting

Cut the follower as needed and install the handle and pull plate, fastening them with the M5 screws provided in the kit. Fasten the half

cylinder with an M5 screw 35 or 45 mm long depending on the lock backset.

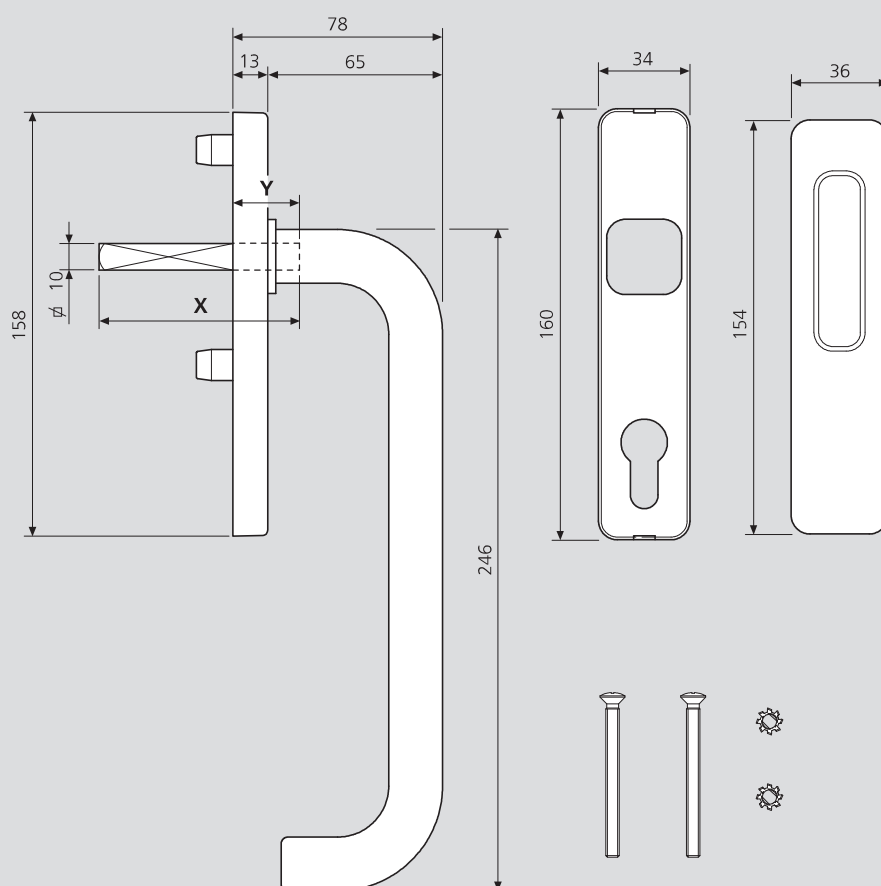

Order specifications

			F1 Silver finish		F5 Electrocolour finish	
Material	X	Y	Article	Finish code	Article	Finish code
Aluminium	75	25	G00744.02.01	AF1	G00744.02.02	AF5

			Polished varnished finish		Anthracite finish	
Material	X	Y	Article	Finish code	Article	Finish code
Brass	90	40	G00745.02.10	OLV	G00745.02.07	OAN